


AC-KIT-888S

Realtek ALC888S 7.1 Channel HD Audio peripheral board,RoHS

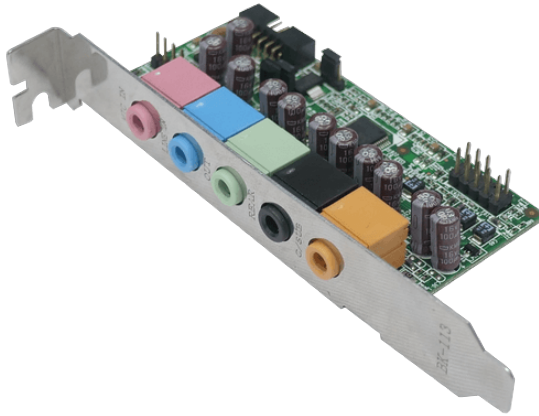

Features

- » Realtek ALC888S HD Audio codec IC supported
- » Five audio jacks for microphone, 7.1+2-channel high definition audio input and output
- » High performance 7.1+2-channel high definition audio board provides 7.1-channel sound playback and multiple streaming through the front panel stereo outputs
- » Digital to Analog Converter (DAC) with 97dB Signal to Noise Ratio (SNR)
- » Analog to Digital Converter (ADC) with 90dB Signal to Noise Ratio (SNR)
- » All the Digital to Analog Converter (DAC) supports 44.1k/48k/96k/192kHz sampling rate
- » All the Analog to Digital Converter (ADC) supports 44.1k/48k/88.2k/96k/192kHz sample rate
- » Driver supports Windows® 2000/2003/XP/Vista/7/10 (32/64 bits) and Linux (Ubuntu or Debian)

Specifications

| | |
|--------------------------|-----------------------------------|
| Form Factor | |
| Form Factor | Full height peripheral board |
| System | |
| Chipset | Realtek ALC888S HD Audio codec IC |
| Physical Characteristics | |
| Dimensions (LxWxH) (mm) | 83.82 mm x 40.64 mm |
| I/O Interface | |
| Audio | Description: Detail - |
| | 1 x Mic-in connector |
| | 1 x Line-in connector |
| | 1 x Front-out connector |
| | 1 x Rear-out connector |
| | 1 x Center/Subwoofer connector |
| | 1 x Line in |
| | 1 x Line out |
| | 1 x Mic |
| | HD Audio : Realtek ALC888S |
| Certifications | |
| Safety & EMC | CE/FCC compliant |

Ordering Information

| | |
|-----------------|--|
| AC-KIT-888S-R10 | Realtek ALC888S 7.1 Channel HD Audio peripheral board,RoHS |
|-----------------|--|

Packing List

| | |
|--|-----------------|
| 1 x AC-KIT-888S audio peripheral board | 1 x Audio cable |
| 1 x QIG | |