


# tKINO-BW

Thin Mini-ITX SBC supports 14nm Intel® Pentium®/Celeron® on-board SoC

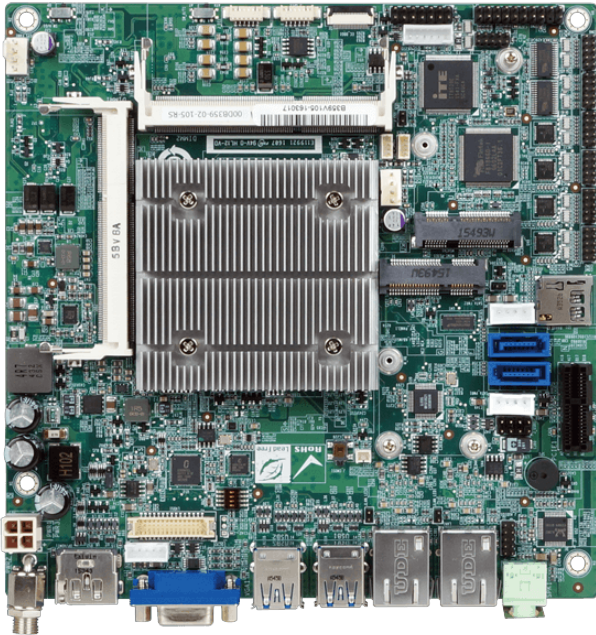

## Features

- » Thin Mini-ITX form factor with 14nm Intel® Pentium®/Celeron® on-board SoC processor supports DDR3L memory
- » Supports USB 3.0, two SATA 6Gb/s
- » Triple independent display, supporting 4K resolution
- » Supports IEI jumperless function

## Specifications

System	
CPU	Intel® Pentium® N3710 on-board SoC (up to 2.56GHz, quad-core, 2MB cache, TDP=6W) Intel® Celeron® N3160 on-board SoC (up to 2.24GHz, quad-core, 2MB cache, TDP=6W) Intel® Celeron® N3060 on-board SoC (up to 2.48GHz, dual-core, 2MB cache, TDP=6W) Intel® Celeron® N3010 on-board SoC (up to 2.24GHz, dual-core, 2MB cache, TDP=4W)
Memory	Two 204-pin 1333/1600 MHz single-channel DDR3L SDRAM unbuffered SO-DIMM
Memory Max.	8GB
Physical Characteristics	
Net Weight	400g
Storage	
Storage	2 x SATA :6Gb/s with 5V output 1 x mSATA :colay SATA2 1 x SD/MicroSD card
I/O Interface	
Display Output	1 x VGA :up to 1920x1200@60Hz 1 x LVDS :18/24-bit dual-channel (up to 1920x1200@60Hz)
Ethernet	1 x Description: Dual Realtek RTL8111E PCIe GbE controller
Audio	Description: Realtek ALC662 HD codec 1 x Line out :on rear IO 1 x Speaker :1x4 pin 1 x Front Audio :2x5 pin
I/O Interface	4 x Internal RS-232 :2x5 pin, P=2.0 2 x Internal RS-232/422/485 :2x5 pin, P=2.0 2 x Internal USB 2.0 :2x4 pin, P=2.54 1 x PS/2 :1x6 pin 1 x DIO :8-bit digital I/O (2x5 pin)
Expansion	1 x PCIe x1 1 x PCIe mini Card Slot
Other Features	

TPM	2x10 pin
<b>Power</b>	
Power Consumption	12V@1.61A (Intel® Celeron® N3710 CPU with two 4 GB 1600 MHz DDR3L memory)
Power Supply	1 x External DC power jack (ø5.5 mm)
	1 x Internal power connector (2x2 pin) Input Voltage Range: 9V ~ 30V
	Support AT/ATX mode
<b>Environment</b>	
Operating Temperature	-20°C ~ 60°C
Storage Temperature	-30°C ~ 70°C
Humidity	5% ~ 95%, non-condensing
<b>Certifications</b>	
Safety & EMC	CE/FCC compliant

## Ordering Information

tKINO-BW-N4-R20	Thin Mini-ITX SBC supports Intel® Pentium® quad-core processor N3710 up to 2.56GHz (6W), VGA/LVDS/DP+HDMI™, SATA, dual GbE, USB 3.0, HD Audio and RoHS
-----------------	--

## Packing List

1 x tKINO-BW single board computer with heatsink	1 x I/O shielding
1 x SATA cable	1 x QIG