


# ICE-CV-D25502/N26002

COM Express Rev 2.0 Basic/Compact Type 2 Modules, Intel® Atom™ D2550 Processor

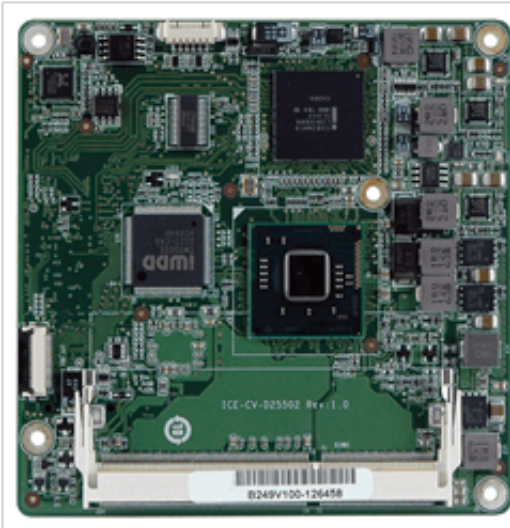

## Features

- » Intel® Atom™ N2600/D2550 processors supported
- » Intel® GMA integrates high-performance graphics and media processing
- » Support DDR3 & DDR3L (1.35V) 1066/800 MHz, up to 4 GB
- » 18/24-bit single-channel LVDS, analog CRT
- » IEI One Key Recovery solution allows you to create rapid OS backup and recovery

## Specifications

|                    |   |
|--------------------|---|
| Display            | Display Output  |
| System             | CPU   |
| Chipset            | Intel® NM10   |
| Memory Max.        | Intel® Atom™ D2550 dual-core processor 1.86 GHz/512 x 2 L2 cache (system max. 4 GB) |
|                    | Supports 1.35V DDR3L  |
| Storage            |   |
| I/O Interface      | Ethernet  |
| Digital I/O        |   |
| Expansion          | 3 x PCIe x1 signal to baseboard   |
| Infrared Interface |   |
| I/O Interface      |   |
| Power              | Power consumption   |
| Environment        | Operating Temperature   |
| Humidity           | 5% ~ 95%, non-condensing  |

## Ordering Information

|                   |  |
|-------------------|--|
| ICE-CV-D25502-R10 | COM Express Rev 2.0 Compact Type 2 Module, Intel Atom D2550 Processor, DDR3, VGA/LVDS, GbE, SATAII, USB, PCI and Audio, RoHS |
| ICE-CV-N26002-R10 | COM Express Rev 2.0 Compact Type 2 Module, Intel Atom N2600 Processor, DDR3, VGA/LVDS, GbE, SATAII, USB, PCI and Audio, RoHS |
| ICE-CV-N28002-R10 | COM Express Rev 2.0 Compact Type 2 Module, Intel Atom N2800 Processor, DDR3, VGA/LVDS, GbE, SATAII, USB, PCI and Audio, RoHS |