


# IPCIE-UART-2D2P

PCIe card supports four RS-232/422/485 Port, RoHs

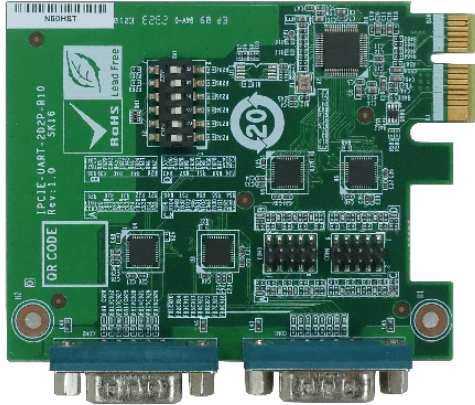

## Features

- » PCIe card supports four RS-232/422/485 Port
- » 128 bytes transmit/receive FIFO
- » High-speed 16C550/16C650/16C750/16C850 compatible UARTs
- » Baud rate supports 115.2K, max. up to 1.5M

## Specifications

<b>Form Factor</b>	
Form Factor	PCI Express® x1
<b>System</b>	
Chipset	Fintek F81504 (PCI Express Bridge to Quad Serial Port), Fintek F81439 (Buffer/Transceiver Series)
<b>Physical Characteristics</b>	
Dimensions (LxWxH) (mm)	70mm x 90mm
Net Weight	GW: 120g / NW: 80g
<b>I/O Interface</b>	
I/O Interface	2 x External RS-232/422/485 : DB-9 2 x Internal RS-232/422/485 : pin header (2x5 pin, P=2.0)
<b>Environment</b>	
Operating Temperature	0°C ~ 60°C
Storage Temperature	-30°C ~ 70°C
Humidity	5% ~ 95%, non-condensing
<b>Certifications</b>	
Safety & EMC	CE/FCC compliant

## Ordering Information

IPCIE-UART-2D2P-R10	PCIe x1 card supports 4-Port RS-232/422/485, RoHs
---------------------	---

## Packing List

1 x IPCIE-UART-2D2P card	1 x Half height bracket
2 x D-SUB9 male cable	1 x QIG (Quick Installation Guide)