


HPCIE-Q170

Half-size PICMG 1.3 CPU Card supports LGA 1151 Intel® Core™ i7/i5/i3, Pentium® or Celeron® CPU with Intel® Q170,

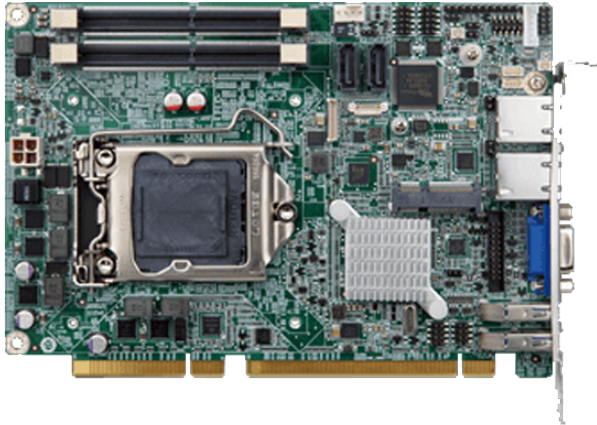

Features

- » PICMG 1.3 half-size CPU card
- » LGA 1151 Intel® 6th/7th generation Core™ i7/i5/i3, Pentium® or Celeron® processor supported
- » Two 260-pin 1867/2133 MHz dual-channel DDR4 SO-DIMMs support up to 32 GB
- » Supports dual independent display by VGA & internal DP pin header
- » PCIe Mini supports mSATA & USB 2.0
- » Intel® PCIe GbE with Intel® AMT 11.0 supported
- » Supports RAID 0, 1 function via SATA 6Gb/s
- » IEI jumper-less function

Specifications

System	
CPU	LGA 1151 socket supports Intel® 6th/7th generation Core™ i7/i5/i3, Pentium® or Celeron® processore
Memory	Two 260-pin 1866/2133 MHz dual-channel DDR4 non-ECC unbuffered SO-DIMM
Memory Max.	32GB
Physical Characteristics	
Dimensions (LxWxH) (mm)	169 X 126
Net Weight	420g
Storage	
Storage	2 x SATA :6Gb/s(RAID 0/1 support) 1 x mSATA :SATA & USB signal
I/O Interface	
Display Output	1 x VGA :up to 1920x1200@60Hz 1 x iDP :interface for HDMI™, LVDS, VGA, DVI, DP (up to 3840x2160@60Hz)
Ethernet	2 x LAN :LAN1: Intel® I219LM Clarkville-V with Intel® AMT 11.0 support LAN2: Intel® I211 PCIe controller
Audio	Description: Support 7.1-channel HD Audio by IEI AC-KIT-892HD kit
I/O Interface	2 x Internal RS-232/422/485 :2x5 pin, p=2.0 2 x External USB 3.2 Gen1x1 4 x Internal USB 2.0 :2x4 pin, p=2.0 1 x PS/2 :1x6 pin 1 x DIO :8-bit digital I/O (2x5 pin)
Expansion	1 x PCIe x16 : signal from CPU via golden finger (supports x16, or x8 + x8, or x4 + x4 + x8) 1 x PCIe x4 : signal from Q170 via golden finger 1 x Full/Half-size PCIe Mini card slot (supports mSATA)
Power	
Power Consumption	5V@0.15A, 12V@8.39A, 3.3V@0.11A, 5VSB@0.21A

	(Intel® Core™ i7-6700K 4.0GHz with two 16 GB 2133 MHz DDR4 memory)
Power Supply	5V/12V, Support AT/ATX mode
Environment	
Operating Temperature	-20°C ~ 60°C
Humidity	5% ~ 95%, non-condensing
Certifications	
Safety & EMC	CE/FCC compliant

Ordering Information

HPCIE-Q170-R10	Half-size PICMG 1.3 CPU card supports LGA 1151 Intel® Core™ i7/i5/i3/Pentium®/Celeron® CPU with Intel® Q170, DDR4 SO-DIMM, VGA, iDP, Intel GbE, USB 3.0, mSATA, SATA, PCIe Mini, Intel® AMT and RoHS
----------------	--

Packing List

1 x HPCIE-Q170 single board computer	1 x SATA cable
1 x QIG	