


# ICE-CV-D25501/N26001

COM Express Rev 2.0 Basic/Compact Type 6 Modules, Intel® Atom™ N2600/D2550 Processor

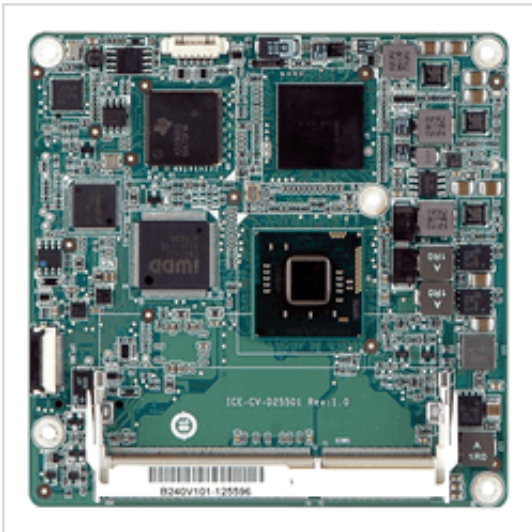

## Features

- » Intel® Atom™ N2600/D2700 processors supported
- » Intel® GMA integrates high-performance graphics and media processing
- » Supports DDR3 & DDR3L (1.35V) 1066/800 MHz, up to 2 GB
- » 18/24-bit single-channel LVDS, analog CRT and two DDI supported
- » IEI One Key Recovery solution allows you to create rapid OS backup and recovery

## Specifications

Display	
Display Output	VGA integrated in the Intel® N2600/D2550 (signal to baseboard)
	1 x CRT (up to 2048x1536@75Hz)
Environment	
Humidity	5% ~ 95%, non-condensing
Operating Temperature	-10°C ~ 60°C
I/O Interface	
Ethernet	RTL 8111E GbE
Expansion	4 x PCIe x1 signal (to baseboard)
System	
Chipset	Intel® NM10
CPU	Intel® Atom™ D2550 dual-core processor
	1.86GHz (2 x 512 L2 cache)
Memory Max.	One 204-pin 1066/800 MHz DDR3 SDRAM SODIMM supported (D2550 supports 1066 MHz)

## Ordering Information

ICE-CV-D25501-R10	COM Express Rev 2.0 Basic/Compact Type 6 Module, Intel Atom D2550 Processor, VGA/LVDS, DDI, GbE, SATA II, USB 3.0 and Audio, RoHS
ICE-CV-N28001-R10	COM Express Rev 2.0 Basic/Compact Type 6 Module, Intel Atom N2800 Processor, VGA/LVDS, DDI, GbE, SATA II, USB 3.0 and Audio, RoHS
ICE-CV-N26001-R10	COM Express Rev 2.0 Basic/Compact Type 6 Module, Intel Atom N2600 Processor, VGA/LVDS, DDI, GbE, SATA II, USB 3.0 and Audio, RoHS