


# ICE-DB-T6R

Baseboard for COM Express Type 6 Module COM.0 Rev. 2.1

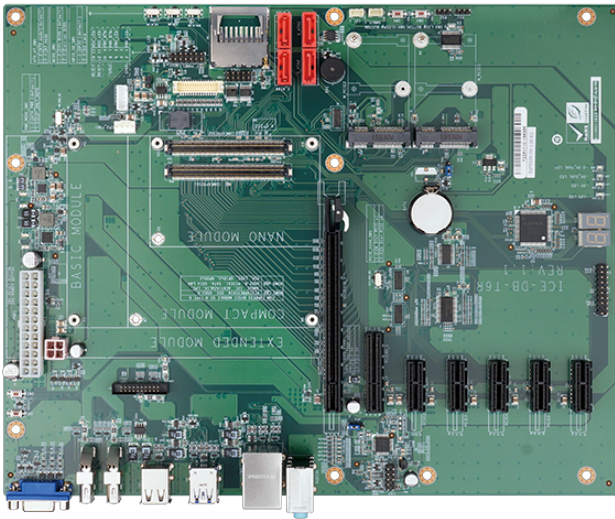

## Features

- » Intel® 22nm Atom™ or Celeron® on-board SoC supported
- » Intel® HD Graphics Gen7 integrates high-performance graphics and media processing
- » Supports 1333/1066 MHz DDR3L (1.35V) memory, up to 8 GB
- » Supports one analog CRT, one 24-bit dual-channel LVDS, and one DDI
- » Optional soldered down 4 GB SSD
- » IEI One Key Recovery solution allows you to create rapid OS backup and recovery

## Specifications

Storage	
Storage	4 x SATA
	1 x SD/MicroSD card
I/O Interface	
Display Output	1 x VGA
	2 x Display Port
	1 x LVDS :18/24-bit single or dual-channel (with PWM back light controller)
	1 x iDP
Audio	Description: Realtek ALC662 HD Audio codec
	1 x Line in :on rear IO
	1 x Line out :on rear IO
	1 x Mic :on rear IO
	1 x Front Audio :2x5 pin
I/O Interface	1 x PS/2
Expansion	1 x PCIe x16
	1 x PCIe x4
	5 x PCIe x1
	2 x PCIe mini Card Slot :with mSATA support,colay with SATA 4
Other Features	
TPM	2x10 pin

## Ordering Information

ICE-DB-T6R-R10	Base Board for COM Express Type 6 Module COM.0 Rev. 2.1,support PICMG EAPI R1.0
----------------	---