


NANO-9452

EPIC SBC with Intel® Core™ 2 Duo/Core™ Duo/Solo Processor

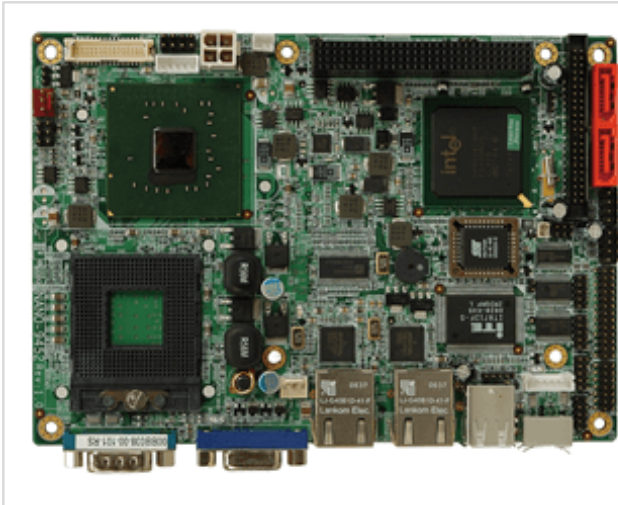

Features

- » Support Intel® Core™ 2 Duo, Core™ Duo/Solo processor with 667 MHz FSB
- » VGA integrated in Intel® 945GME supports 1080i HDTV-out, 18/24-bit dual-channel LVDS
- » DDR2 667/533/400 MHz SO-DIMM socket supports up to 2 GB
- » Dual Broadcom BCM5787M PCIe GbE chipset
- » IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Specifications

| | |
|-----------------|--|
| Display | Display |
| System | CPU |
| Chipset | Intel® 945GME + ICH7M |
| Memory Max. | 1 x 200-pin 400/533/667 MHz 2 GB DDR2 SO-DIMM (system max. 2GB) |
| CPU Socket | Socket M |
| I/O Interface | Ethernet |
| Digital I/O | 8-bit digital I/O (4-bit input/4-bit output) |
| Audio | AC-KIT-892HD-R10 AC-KIT08R |
| I/O Interface | 3 x RS-232 1 x RS-232/422/485 6 x USB 2.0 1 x LPT 1 x Infrared interface 1 x PS/2 for KB/MS |
| Power | Power consumption |
| Environment | Operating Temperature |
| Humidity | 5% ~ 95% non- condensing |
| Option | iRIS |
| Storage | Storage |
| Expansion Slots | Expansion Slots |
| FSB | FSB |
| Watchdog Timer | Watchdog Timer |
| CPU Cooler | CPU Cooler |
| I/O Interface | I/O Interface |
| 1 x LPT | |
| 3 x RS-232 | |
| 1 x RS-422/485 | |

Ordering Information

NANO-9452-R40

EPIC SBC Intel Core Duo FSB667Mhz with CRT/LCD,Dual PCIE-GbE,SATA and Audio,RoHS