


AC-KIT-888S

Realtek ALC888S 7.1 Channel HD Audio peripheral board,RoHS

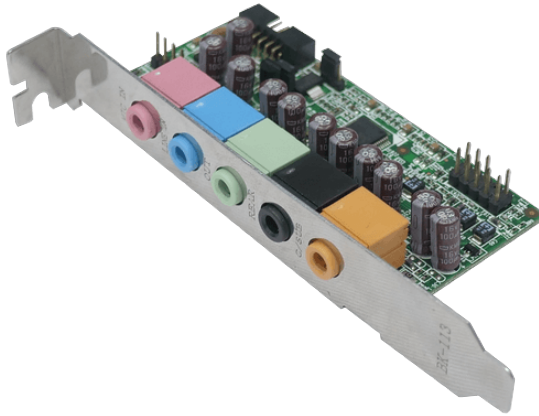

Features

- » Realtek ALC888S HD Audio codec IC supported
- » Five audio jacks for microphone, 7.1+2-channel high definition audio input and output
- » High performance 7.1+2-channel high definition audio board provides 7.1-channel sound playback and multiple streaming through the front panel stereo outputs
- » Digital to Analog Converter (DAC) with 97dB Signal to Noise Ratio (SNR)
- » Analog to Digital Converter (ADC) with 90dB Signal to Noise Ratio (SNR)
- » All the Digital to Analog Converter (DAC) supports 44.1k/48k/96k/192kHz sampling rate
- » All the Analog to Digital Converter (ADC) supports 44.1k/48k/88.2k/96k/192kHz sample rate
- » Driver supports Windows® 2000/2003/XP/Vista/7/10 (32/64 bits) and Linux (Ubuntu or Debian)

Specifications

Form Factor	
Form Factor	Full height peripheral board
System	
Chipset	Realtek ALC888S HD Audio codec IC
Physical Characteristics	
Dimensions (LxWxH) (mm)	83.82 mm x 40.64 mm
I/O Interface	
Audio	Description: Detail -
	1 x Mic-in connector
	1 x Line-in connector
	1 x Front-out connector
	1 x Rear-out connector
	1 x Center/Subwoofer connector
	1 x Line in
	1 x Line out
	1 x Mic
	HD Audio : Realtek ALC888S
Certifications	
Safety & EMC	CE/FCC compliant

Ordering Information

AC-KIT-888S-R10	Realtek ALC888S 7.1 Channel HD Audio peripheral board,RoHS
-----------------	------------------------------------------------------------

Packing List

1 x AC-KIT-888S audio peripheral board	1 x Audio cable
1 x QIG	