


# DM2-W238

23.8" Latest Generation Industrial Monitor

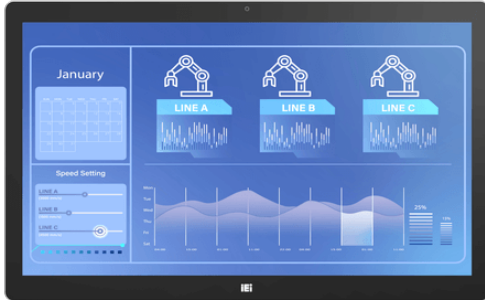

## Features

- » Front OSD, easy access for setting adjustment
- » Speakers positioned at the front, ensuring clear sound delivery even in panel mount
- » Supports gloved operation and waterproof protection
- » Built-in camera, ideal for AI facial recognition
- » USB 3.2 Gen1 Type-A supports 10W
- » IP65 compliant front panel with aluminum frame
- » Anti-glare and anti-UV PCAP

## Specifications

| Display                  |  |
|--------------------------|--|
| LCD Size                 | 23.8" (16:9)   |
| Brightness(cd/m2)        | 350  |
| Max Resolution           | 1920 x 1080  |
| Contrast Ratio           | 1000:1   |
| Backlight MTBF(hrs)      | 30000  |
| 輸出/入介面                   |  |
| I/O Ports                | 1 x VGA (DB-15)  |
|                          | 1 x HDMI   |
|                          | 1 x DisplayPort1.1   |
|                          | 1 x USB 3.2 Gen1 Type-B  |
|                          | 4 x USB 3.2 Gen1 Type-A (5V2A) (Lite without)                            |
|                          | 1 x Line out   |
|                          | 1 x 9V-36V DC jack   |
|                          | 1 x 3-pin terminal block   |
| Power                    |  |
| Power adapter            | 12V DC   |
| Environment              |  |
| Operating Temperature    | 0°C ~ 50°C   |
| Humidity                 | 10% to 95%@40°C (non-condensing)   |
| Storage Temperature      | -20°C ~ 60°C   |
| IP Level                 | IP 65 compliant front panel  |
| Physical Characteristics |  |
| Color                    | Black + Silver   |
| Dimensions (LxWxH) (mm)  | 571.40 x 354.50 x 51.20  |
| Cutout Dimensions        | 553.20 x 332.50  |
| LCD                      |  |
| LCD Color                | 16.7M  |
| Viewing Angle (H-V)      | 178°/178°  |
| Touch                    |  |
| Touch Screen             | 10-point Projected capacitive touch window (Anti-UV, Anti-glare Surface) |
| Touch Controller         | Capacitive:litek   |

## Ordering Information

|                |   |
|----------------|---|
| DM2-W238K-R10  | 23.8" 350 cd/m <sup>2</sup> 1920 x 1080 monitor, VGA, HDMI, DisplayPort, with USB 3.0 HUB, USB PC touch screen, 9 ~36V DC input, Speaker, Camera, R10 |
| DM2-W238KL-R10 | 23.8" 350 cd/m <sup>2</sup> 1920 x 1080 monitor, VGA, HDMI, DisplayPort, USB PC touch screen, 9 ~36V DC input, Lite, R10                              |

## Packing List

|                          |                     |
|--------------------------|---------------------|
| 1 x DM2-W238             | 1 x USB-touch Cable |
| 1 x 3-pin Terminal Block | 4 x VESA Screws     |
| 12 x Panel Mount Kit     |                     |