


# iUA-CM6533

## USB AUDIO BOARD

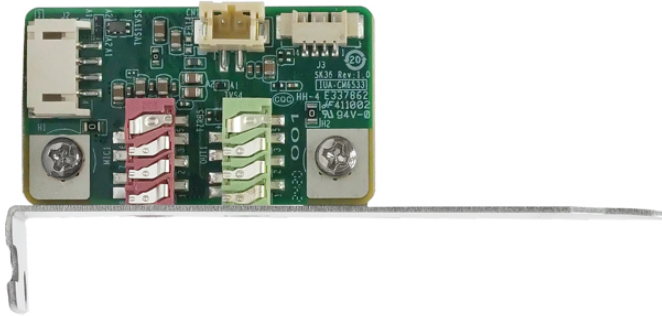

### Features

- » C-MEDIA CM6533 Audio Chip
- » USB2.0 interface
- » Two audio jacks for mic in & line out
- » Built-in two 1.5W power amplifier
- » speaker outputs

### Specifications

|                          |  |
|--------------------------|--|
| Form Factor              |  |
| Form Factor              | USB2.0   |
| Physical Characteristics |  |
| Dimensions (LxWxH) (mm)  | 44mm x 25mm  |
| I/O Interface            |  |
| Audio                    | Description: Audio IC CM6533                                 |
|                          | Half-height bracket  |
|                          | 1 x Line in : MIC in (audio jack)                            |
|                          | 1 x Line out : audio jack                                    |
|                          | 2 x Speaker : Built-in output 4pin P=1.25mm (1.5W amplifier) |
| Environment              |  |
| Operating Temperature    | 0°C ~ 60°C   |
| Storage Temperature      | -30°C ~ 70°C   |
| Humidity                 | 10% ~ 95%, non-condensing                                    |

### Ordering Information

|                |   |
|----------------|---|
| iUA-CM6533-R10 | IEI USB Audio adapter board, small size, Mic in, Amplifier speaker output, Line-out, RoHS |
|----------------|---|

### Packing List

|  |   |
|--|---|
| 1 x iUA-CM6533 audio board               | 1 x USB cable (210mm, 2.0 to 2.0 Pitch) |
| 1 x USB cable (210mm, 2.0 to 2.54 Pitch) |   |